



TECHNICAL DATA SHEET 310031

Room 9,11 Floor, Chuangxin Building Block 1, No.1, Technology Road, Technology Chuangxin Park,,
West of Dayabay, Huizhou City, Guangdong, P.R. China

TEL (86 752) 5533798 FAX (86 752) 5533798-811

DESCRIPTION:

Resinlab 310031 is a two-part methacrylate adhesive designed for structural bonding of thermoplastic, metal and composite assemblies¹. Combined at a 1:1 ratio, it has a working time of 15 to 18 minutes and achieves 75% of ultimate strength in 30 to 35 minutes at room temperature. It is particularly well suited for bonding thermoplastic materials. This adhesive combines high strength and stiffness with the ability to adhere difficult-to-bond materials. Resinlab 310031 is supplied in ready-to-use cartridges, 5 gallon pails, or 50 gallon drums and can be dispensed as a non-sagging gel using standard meter-mix equipment.

Resinlab 310031 has excellent chemical resistance⁴ to hydrocarbons, acids and bases (3-10 pH), and salt solutions, and is susceptible to polar solvents. It is recommended for ABS, acrylics, epoxies, FRP, gelcoats⁶, polyesters (including DCPD modified), PVC, styrenics, urethanes (general), and vinyl esters.

Resinlab 310031 bears the following features and benefits:

- No Surface Preparation
- High Strength
- High Modulus
- 100% Reactive
- Excellent Tolerance to Off-Ratio Mixing
- Non-Sagging
- Room Temperature Cure
- Working Time² 15 - 18 minutes
- Fixture Time³ 30 - 35 minutes
- 51 °F Flash Point
- Operating Temperature -67 °F to 250 °F
- Gap Filling to .125 inches
- Mixed Density 8.35 lbs/gal (1.00 g/cc)

TYPICAL PROPERTIES:

All properties given are at room temperature unless otherwise noted.

<i>Property:</i>	<i>Value:</i>
Viscosity - Adhesive	40,000 - 60,000 cP
Viscosity - Activator	40,000 - 60,000 cP
Color - Adhesive	Off-White
Color - Activator	Yellow
Density - Adhesive	8.60 lbs/gal (1.03 g/cc)
Density - Activator	8.10 lbs/gal (.97 g/cc)
Mix Ratio by Volume	1:1
Mix Ratio by Weight	1:1
Mechanical Properties (Cured)	
Tensile (ASTM D638)	

RESINLAB L.L.C. MAKES NO EXPRESS OR IMPLIED WARRANTIES OR MERCHANTABILITY, FITNESS OR OTHERWISE with respect to its products. In addition, while the information contained herein is believed to be reliable, no warranty is expressed or implied regarding the accuracy of the data or the results to be obtained from the use thereof. All recommendations or suggestions for use are made without guarantee inasmuch as conditions of use are beyond our control. The properties given are typical values and are not intended for use in preparing specifications. Users should make their own test to determine the suitability of this product for their own purposes.




TECHNICAL DATA SHEET 310031

Room 9,11 Floor, Chuangxin Building Block 1, No.1, Technology Road, Technology Chuangxin Park,,
West of Dayabay, Huizhou City, Guangdong, P.R. China

TEL (86 752) 5533798 FAX (86 752) 5533798-811

Strength	4000 - 4500 psi
Modulus	150,000 - 175,000 psi
Strain to Failure	5 - 15%
Lap Shear (ASTM D1002)	
Cohesive Strength	3000 - 3500 psi

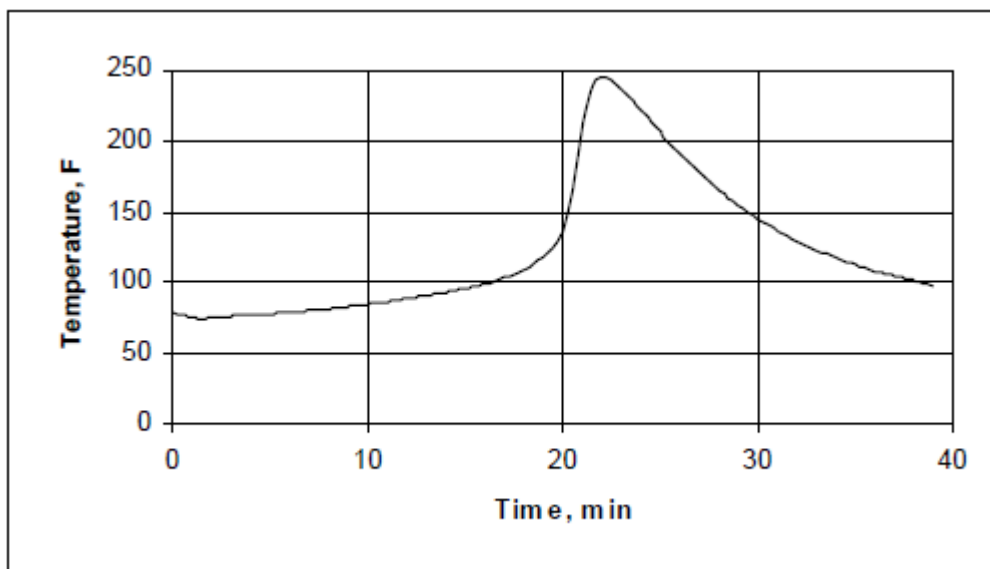

Typical Exotherm Curve for Resinlab 310031 at 75°F (10 grams)⁵

HANDLING AND APPLICATION:

Resinlab 310031 (Parts A and B) is flammable. Contents include Methacrylate Ester. Keep containers closed after use. Wear gloves and safety glasses to avoid skin and eye contact. Wash with soap and water after skin contact. In case of eye contact, flush with water for 15 minutes and get medical attention. Harmful if swallowed. Keep out of reach of children. Keep away from heat, sparks, and open flames. Reference the Material Safety Data Sheet for more complete safety information.

Note: Because of the rapid curing features of this product, large amounts of heat are generated when large masses of material are mixed at one time. The heat generated by the exotherm resulting from the mixing of large masses of adhesive can result in the release of entrapped air, steam, and volatile gases. To prevent this, use only enough material as needed for use within the working time for the product and confine gap thickness to no more than .125 inch.

RESINLAB L.L.C. MAKES NO EXPRESS OR IMPLIED WARRANTIES OR MERCHANTABILITY, FITNESS OR OTHERWISE with respect to its products. In addition, while the information contained herein is believed to be reliable, no warranty is expressed or implied regarding the accuracy of the data or the results to be obtained from the use thereof. All recommendations or suggestions for use are made without guarantee inasmuch as conditions of use are beyond our control. The properties given are typical values and are not intended for use in preparing specifications. Users should make their own test to determine the suitability of this product for their own purposes.



TECHNICAL DATA SHEET 310031

Room 9,11 Floor, Chuangxin Building Block 1, No.1, Technology Road, Technology Chuangxin Park,,
West of Dayabay, Huizhou City, Guangdong, P.R. China

TEL (86 752) 5533798 FAX (86 752) 5533798-811

DISPENSING ADHESIVE:

Resinlab 310031 may be applied manually or with automated equipment. Automated application may be accomplished with a variety of 1 to 1 meter-mix equipment delivering both components to a static mixer. For information concerning meter- mix equipment, contact Resinlab Sales Representatives. Pre-measured cartridges are also available, as well as the hand-held guns with which to dispense the adhesive. For more information, contact Resinlab. To assure maximum bond strength, surfaces must be mated within the specified working time. Use sufficient material to ensure the joint is completely filled when parts are mated and clamped. All adhesive application, part positioning, and fixturing should occur *before* the working time of the mix has expired. After indicated working time, parts must remain undisturbed until the fixture time is reached. Automated equipment should be constructed of stainless steel or aluminum. Avoid contact with copper or copper containing alloys in all fittings, pumps, etc.. Seals and gaskets should be made of Teflon, Teflon-coated PVC foam, ethylene/propylene or polyethylene. Avoid the use of Viton, BUNA-N, Neoprene or other elastomers for seals and gaskets. Clean-up is easiest *before* the adhesive has cured. Citrus terpene or N-methyl pyrrolidone (NMP) containing cleaners and degreasers can be used for best results. If the adhesive is already cured, careful scraping, followed by a solvent wipe may be the most effective method of clean-up.

EFFECT OF TEMPERATURE:

Application of adhesive at temperatures between 65°F and 80°F will ensure proper cure. Temperatures below 65°F will slow cure speed; above 80°F will increase cure speed. The viscosities of Parts A and B of this adhesive are affected by temperature. To ensure consistent dispensing in meter-mix equipment, adhesive and activator temperatures should be held reasonably constant throughout the year.

SHELF LIFE AND STORAGE:

The shelf life of Resinlab 310031 adhesive (Part A), including cartridges that contain adhesive, is 6 months from day of shipment from Resinlab. Shelf life of activator (Part B) is 12 months from day of shipment. Shelf life is based on continuous storage between 55°F and 75°F. Long term exposure above 75°F will reduce the shelf life of these materials. Prolonged exposure of activators, including cartridges which contain activators, above 100°F quickly diminishes the product's reactivity and should be avoided. Shelf life can be extended by refrigeration (45°F - 55°F). These products should never be frozen.

NOTES:

1. It is strongly recommended all substrates be tested with the selected adhesive in the anticipated service conditions to determine suitability.
2. Working Time: The time elapsed between the moment Parts A and B of the adhesive system are combined and

RESINLAB L.L.C. MAKES NO EXPRESS OR IMPLIED WARRANTIES OR MERCHANTABILITY, FITNESS OR OTHERWISE with respect to its products. In addition, while the information contained herein is believed to be reliable, no warranty is expressed or implied regarding the accuracy of the data or the results to be obtained from the use thereof. All recommendations or suggestions for use are made without guarantee inasmuch as conditions of use are beyond our control. The properties given are typical values and are not intended for use in preparing specifications. Users should make their own test to determine the suitability of this product for their own purposes.



*TECHNICAL
DATA SHEET
310031*

Room 9,11 Floor, Chuangxin Building Block 1, No.1, Technology Road, Technology Chuangxin Park,,
West of Dayabay, Huizhou City, Guangdong, P.R. China

TEL (86 752) 5533798 FAX (86 752) 5533798-811

thoroughly mixed and the time when the adhesive is no longer useable. Times presented were tested at 75°F.

3. Fixture Time: The interval of time after which surface being joined will support a 2 lb. (1 kg) dead weight on a 1/2 inch (12.7mm) overlap joint 1 inch (25.4 mm) wide without movement. Times presented were tested at 75°F.
4. Resistance to chemical exposure varies greatly based on several parameters including; temperature, concentration, bondline thickness, and duration of exposure. The chemical resistance guidelines listed assume long term exposures at ambient conditions.
5. In a typical bond line, exotherm temperatures will be lower than the temperatures shown.
6. Urethane-modified super-weathering gelcoats may require an alternate adhesive. As with all substrates, these gelcoats should be tested with the selected adhesive to determine suitability.

RESINLAB L.L.C. MAKES NO EXPRESS OR IMPLIED WARRANTIES OR MERCHANTABILITY, FITNESS OR OTHERWISE with respect to its products. In addition, while the information contained herein is believed to be reliable, no warranty is expressed or implied regarding the accuracy of the data or the results to be obtained from the use thereof. All recommendations or suggestions for use are made without guarantee inasmuch as conditions of use are beyond our control. The properties given are typical values and are not intended for use in preparing specifications. Users should make their own test to determine the suitability of this product for their own purposes.